

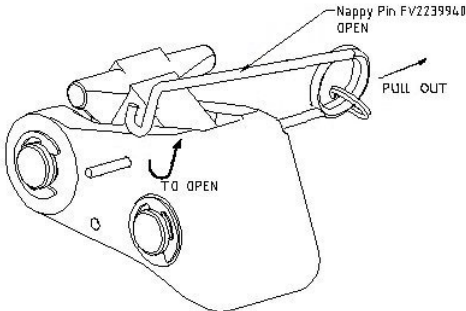
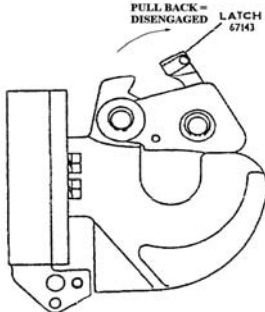
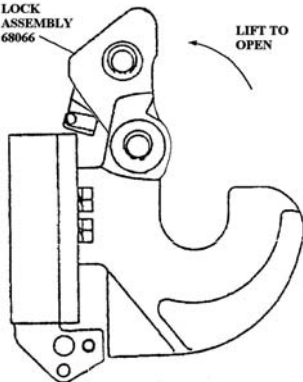


B. Dixon Bate Ltd  
Unit 45, First Avenue, Deeside Industrial Park  
Deeside Flintshire CH5 2LG  
Telephone +44 (0)1244 288925 Facsimile +44 (0)1244 288462

## Towing Pintle User Manual

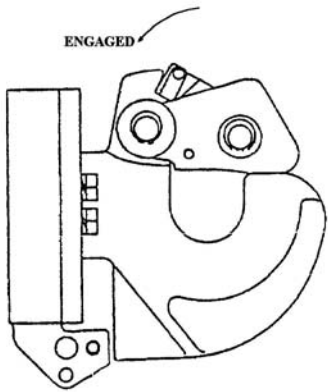
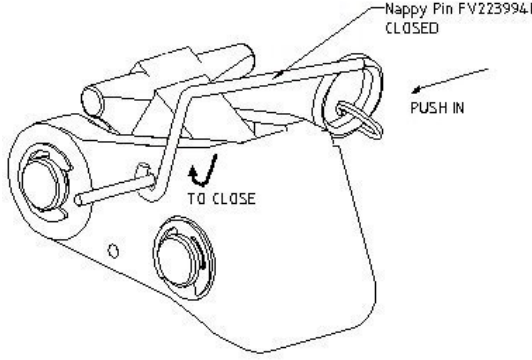
### FV987958 Light Pintle FV987957 Medium Pintle

<b>Visual Inspection</b>		
1	Visual Inspection	Check that all parts are undamaged

<b>Opening Operation</b>		
1	Opening Operation	Open Nappy Pin and pull out. Do not permanently deform item. See Fig. 1:
2	Opening Operation	Pull Latch back until disengaged. See Fig. 2:
3	Opening Operation	Lift Lock until vertical. Check that Lock Assembly remains open without aid. See Fig. 3:
<div><p>Fig. 1:</p></div> <div><p>Fig. 2:</p></div> <div><p>Fig. 3:</p></div>		

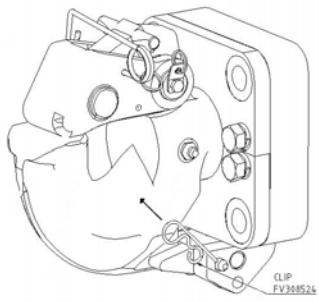
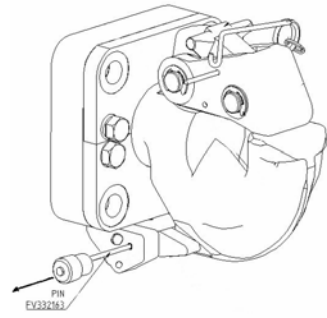


B. Dixon Bate Ltd  
Unit 45, First Avenue, Deeside Industrial Park  
Deeside Flintshire CH5 2LG  
Telephone +44 (0)1244 288925 Facsimile +44 (0)1244 288462

<b>Closing Operation</b>		
4	Closing Operation	Push Lock Assembly down until fully closed. The latch will engage. See Fig. 4:
5	Safety check	Check that the Latch is engaged. Try pulling the Lock Assembly up without disengaging the Latch.
6	Safety check	If the Lock Assembly can NOT be pulled up, proceed to point 8.
7	Safety check	If the Lock Assembly can be pulled up without disengaging the Latch, repeat from step 4 onwards. If the problem persists, do not use the unit for towing. Report the fault.
8	Closing Operation	Insert Nappy pin from Tag side and close it. See Fig. 5:
Fig. 4: 		Fig. 5: 
9	Safety check	Check that Latch can NOT be opened and Locks are engaged and Pins are closed.



B. Dixon Bate Ltd  
Unit 45, First Avenue, Deeside Industrial Park  
Deeside Flintshire CH5 2LG  
Telephone +44 (0)1244 288925 Facsimile +44 (0)1244 288462

<b><i>Towing Operation</i></b>		
Prior to towing 'Off-road' disengage the Fork to permit the rotation of the Pintle.		
1	Disengaging Operation	Pull Clip out of Pin. See Fig. 6:
2	Disengaging Operation	Pull Pin out of Fork. See Fig. 7:
3	Disengaging Operation	Drop Fork until vertical and insert Pin into lower hole. Insert Clip into Pin. See Fig. 8:
4	Engaging Operation	Repeat step 1 and 2.
5	Engaging Operation	Raise Fork until horizontal and insert Pin into upper hole. Insert Clip into Pin See Fig. 9:
Fig. 6:		Fig. 7:
		
Fig. 8:		Fig. 9:
